



## Non-Return Nozzle check valve



- ✓ BS EN1074-3/85 EN12334.
- ✓ Range: DN50-DN300.
- ✓ Working pressure: PN10/PN16/PN25.
- ✓ Temperature range: 0°C-80°C.
- ✓ Fusion bonded epoxy coating.

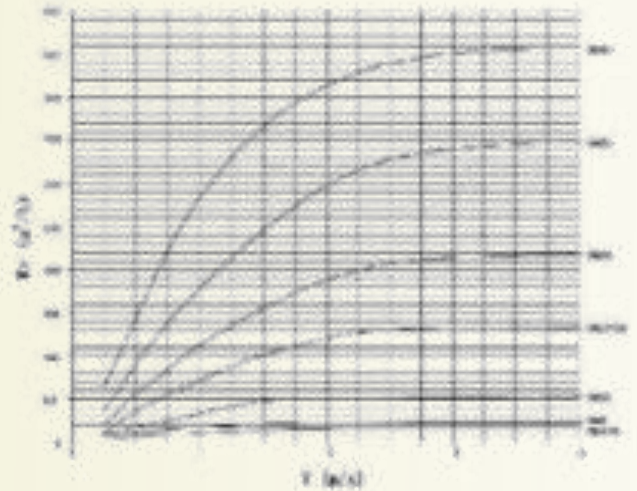

### PART LIST & Dimensions

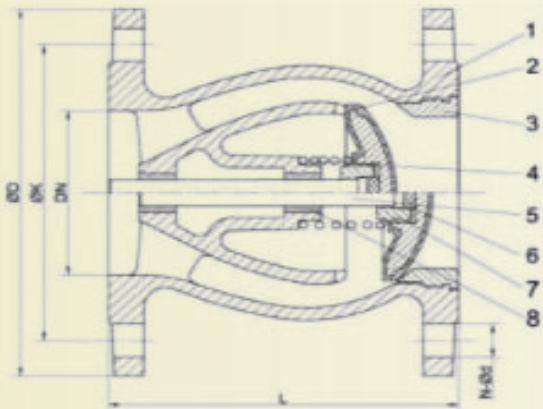

No.	Component	Standard Material
1	Body	Ductile iron
2	Ball	NBR
3	O-Ring	NBR
4	Cover	Ductile iron
5	Gasket	SS304
6	Washer	SS304
7	Nut	SS304

DN	50	65	80	100	125	150	200	250	300	
Face to face(L)	150	150	180	190	210	210	230	250	270	
Outer diameter of flange 7005-2 EN1092-2/ISO	PN10	165	185	200	220	250	285	340	400	455
	PN16	165	185	200	220	250	285	340	400	455
	PN25	165	185	200	235	270	300	360	425	485
Weight of PN16(kg.) approx.	7	8	12	15	20	25	41	59	80	
Shell test	37.5Bar									
Seat test	0.5 Bar & 27.5 Bar									